



A
FRONT VIEW


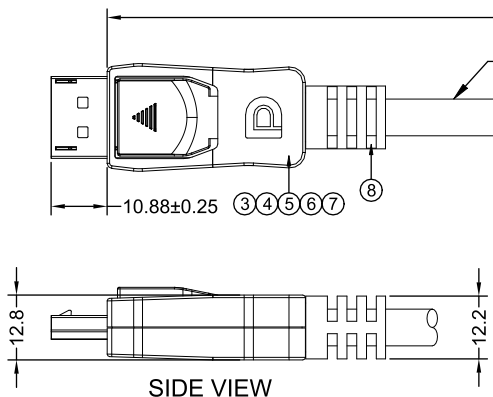


SIDE VIEW

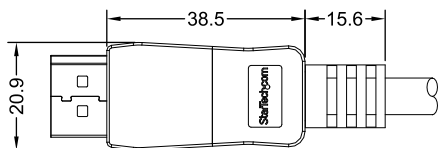


BACK VIEW


Ø7.3±0.2

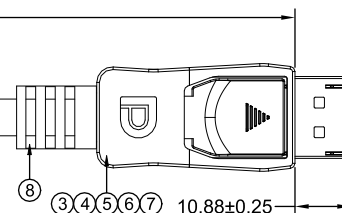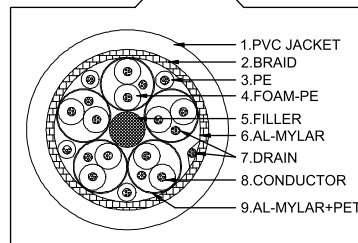

B
FRONT VIEW

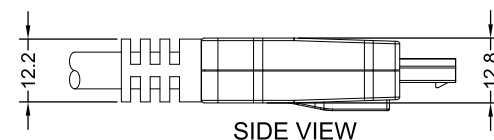

SIDE VIEW

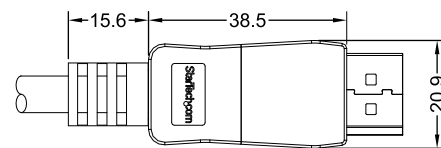

BACK VIEW

CONNECTION


DP PLUG	PAIR#	PIN NAME	COLOR	DP PLUG
1	PAIR1 BLUE	ML_Lane 0(p)	BLUE	12
2		GND	DRAIN	11
3	PAIR2 BROWN	ML_Lane 0(n)	WHITE	10
4		ML_Lane 1(p)	BLUE	9
5	PAIR3 RED	GND	DRAIN	8
6		ML_Lane 1(n)	WHITE	7
7	PAIR4 YELLOW	ML_Lane 2(p)	BLUE	6
8		GND	DRAIN	5
9	PAIR5 GREEN	ML_Lane 2(n)	WHITE	4
10		ML_Lane 3(p)	BLUE	3
11	CONFIG 1	GND	DRAIN	2
12		ML_Lane 3(n)	WHITE	1
13	CONFIG 2	ORANGE		13
14		RED		14
15	PAIR5 GREEN	AUX_CH(p)	BLUE	15
16		GND	DRAIN	16
17	PAIR5 GREEN	AUX_CH(n)	WHITE	17
18		Hot plug Detect	BROWN	18
19	SHELL	GND	YELLOW	19
20		Braid(GND)	GND	SHELL

PRODUCT SKU	LENGTH(mm)	COLOUR	TOLERANCE(mm)
DISPLPORT1L	305	BLACK	±20
DISPLPORT3L	915	BLACK	±30
DISPLPORT6L	1830	BLACK	±50
DISPLPORT10L	3050	BLACK	±100

ELECTRIC TESTING:
1.100% OPEN & SHORT TESTING
2.INSULATION RESISTANCE: $\geq 20M\Omega$
3.CONDUCTOR RESISTANCE: $\leq 2.5\Omega$
4.VOLTAGE: 300V DC/0.1S

⑧	PVC MOLDING STRAIN RELIEF,COLOR:BLACK	2
⑦	LD PE MOLDING INTERNAL MODEL,COLOR:CLEAR	2
⑥	METAL BOTTOM SHELL, USED FOR DP CONNECTOR	2
⑤	METAL TOP SHELL, USED FOR DP CONNECTOR	2
④	ABS BOTTOM SHELL,USED FOR DP CONNECTOR,COLOR:BLACK	2
③	ABS TOP SHELL,USED FOR DP CONNECTOR,COLOR:BLACK	2
②	DP 20P MALE CONNECTOR,TERMINALS GOLD PLATED,METAL SHELL NI PLATED, INSULATOR COLOR:BLACK	2
①	DP CABLE,(28AWG*1P+AEM)*5+28AWG*4C+F+AEB,PVC JACKET,COLOR:BLACK	1
ITEM	DESCRIPTIONS	Q'TY

THIRD ANGLE PROJECTION



GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE
THIS DOCUMENT CONTAINS CONFIDENTIAL,
PROPRIETARY INFORMATION THAT IS
PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	DISPLPORTxL		
DESCRIPTION	DisplayPort 1.2 Cable - 4K x 2K Ultra HD VESA Certified Latching Connectors		
DO NOT SCALE	SHEET: 1 OF: 1	UPLOAD DATE: 8/16/2021	