


USB 3.0 Laptop Docking Station w/ Dual Video, 4K DisplayPort™, HDMI®, USB Fast-Charge Port, USB 3.0 Hub

Product ID

USB3DOCKHDPC

Product Diagram (Side A)

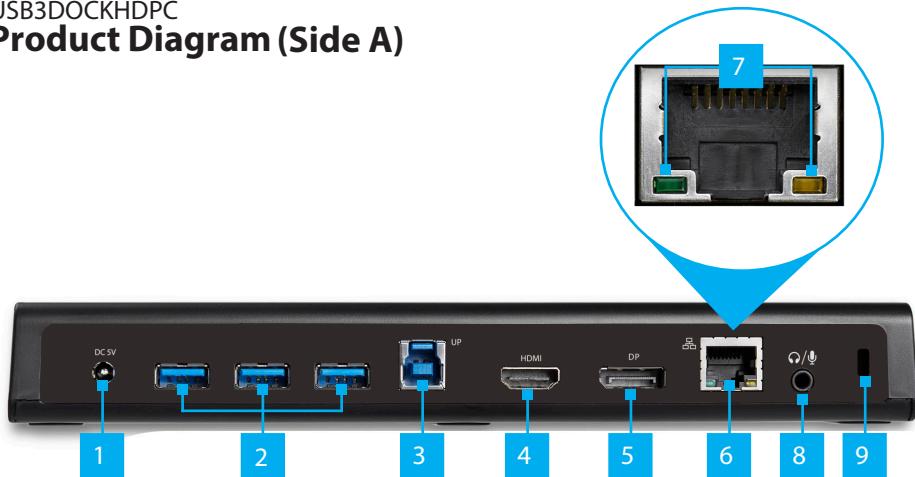

(Side B)



Component	Function
1 DC 5V Port	<ul style="list-style-type: none"> Connect to a Power Source, Using the Included Power Adapter
2 3x USB-A Data Ports	<ul style="list-style-type: none"> Connect USB-A Peripherals USB (5Gbps) Supports 5 V/0.9A (4.5W) of Power
3 USB-B Host Port	<ul style="list-style-type: none"> Connect to a USB-A Port on a Host Computer USB (5Gbps)
4 HDMI Output Port	<ul style="list-style-type: none"> Connect an HDMI Display Supports Resolutions up to 2560 x 1440 60Hz
5 DisplayPort Output Port	<ul style="list-style-type: none"> Connect a DisplayPort Display Supports Resolutions up to 3840 x 2160 30Hz
6 Gigabit Ethernet Port	<ul style="list-style-type: none"> Connect the Dock to a Network Device, using a Network Cable 10/100/1000 Mbps
7 Network LED Indicators	<ul style="list-style-type: none"> Indicates Link Speed and Activity Network Link Detection LED Indicator (Green) <ul style="list-style-type: none"> Off = No Network Detected Solid Green = Network Detected Network Activity LED Indicator (Amber) <ul style="list-style-type: none"> Off = No Network Activity Flashing Amber = Network Activity
8 3.5mm Audio Port	<ul style="list-style-type: none"> Connect an Audio Device 4 Position Audio Jack for Headset use CTIA/OMTP
9 Lock Slot (K-Slot)	<ul style="list-style-type: none"> Connect a K-Slot Style Locking Device to deter the theft of the Docking Station
10 USB-A Data/Charge Port	<ul style="list-style-type: none"> Connect and/or charge a USB-A Peripheral USB (5Gbps) Supports BC 1.2 5V/1.5A (7.5 W) charging

Requirements

- Host Computer
- With an available USB-A (5Gbps) Port

For the latest drivers, manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/USB3DOCKHDPC

Package Contents

- USB 3.0 Laptop Docking Station x 1
- 2ft (61cm) USB 3.0 Cable x 1
- Power Adapter x 1
- 3x Power Cords (NA/UK/EU)
- Quick-Start Guide x 1


To view manuals, FAQs, videos, drivers, downloads, technical drawings, and more, visit www.startech.com/support.

Installation

1. Connect the **Power Adapter** from an AC outlet, to the **DC 5V Port** on the dock.
2. Connect USB Peripheral Devices to the **USB-A Data Ports** and **USB-A Data/Charge Port** on the dock.
3. Connect an RJ-45 terminated network cable (CAT 5e or better) from your local area network (e.g. Router, Switch, Modem, etc.) to the **Gigabit Ethernet Port** on the dock, to access your network via a wired LAN connection.
4. Connect an HDMI Display Device to the **HDMI Output Port** on the dock.
5. Connect a DisplayPort Display Device to the **DisplayPort Output Port** on the dock.
6. Connect a 3.5mm audio device (headset, speakers, etc.) to the **3.5mm Audio Port** on the dock.
7. If the Host Computer is running a supported version of Windows or ChromeOS and has Internet access, connect the **USB 3.0 Cable** to the **USB-B Host Port** located on the dock, and to a USB-A port on the Host Computer. The **Host Computer** will automatically detect the device and install all the required drivers.

If the Host Computer is not running Windows or ChromeOS or the drivers do not automatically install, disconnect the dock from the **Host Computer**, then:

- a. Navigate to www.StarTech.com/USB3DOCKHDPC, and click the **Drivers/Downloads** tab.
- b. Under **Driver(s)**, download the Driver Package for your operating system, and follow the steps outlined in the Installation guide, that's included in the Driver Package.



Regulatory Compliance

FCC -- Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.
CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Warranty Information

This product is backed by a 3-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

StarTech.com

Ltd.

45 Artisans Cres

London, Ontario

N5V 5E9

Canada

StarTech.com LLP

4490 South Hamilton

Road

Groveport, Ohio

43125

U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15

Gowerton Rd,

Brackmills,

Northampton

NN4 7BW

United Kingdom

StarTech.com Ltd.

Siriusdreef 17-27

2132 WT Hoofddorp,

The Netherlands

IT: startech.com/it

JP: startech.com/jp

FR: startech.com/fr

DE: startech.com/de

ES: startech.com/es

NL: startech.com/nl