

Serial ExpressCard

4 port 16C950 Serial ExpressCard

EC4S950

Instruction Manual



Actual product may vary from photo

StarTech.com
Making hard-to-find easy!

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction	1
Features	1
System Requirements	1
Package Contents	1
Installation	2
Safely removing the ExpressCard	3
Specifications	4
Accessory Products from StarTech.com	4
Technical Support	5
Warranty Information	5

Introduction

Thank you for purchasing a StarTech.com 16C950 Serial ExpressCard. Now you can connect standard serial devices to any computer with an available ExpressCard slot; providing data transfer rates of up to 921Kbps, this is the perfect solution for connecting serial peripherals such as POS devices, PDAs, digital cameras, printers, ISDN terminal adapters and more.

Features

- High Performance 16C950 UART with maximum data transfer rates up to 921.6 kbps
- Automated out-of-band flow control
- 128-byte deep FIFO per transmitter and receiver
- Automated in-band software flow control using programmable Xon/Xoff in both directions

Before you begin

System requirements:


- A computer with an available ExpressCard slot (Please see Accessory Products from StarTech.com if you wish to use this ExpressCard with a desktop computer).
- Operating system requirements: Windows® 8 (32/64bit), 7 (32/64), Vista (32/64), XP (32/64), 2000, Windows Server® 2003 (32/64)

Package contents:

This package should contain:

- 1 x Serial RS-232 ExpressCard
- 1 x 4-Port DB9 Hub with Adapter Cable
- 1 x Instruction Manual
- 1 x Driver CD

Installation

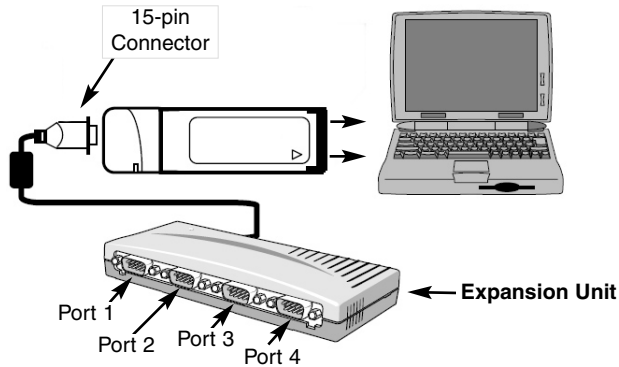


Caution: It is advisable to remove all possible static discharge potential from any objects that the ExpressCard may come in contact with before installation. This can be accomplished by touching a grounded metal object, prior to insertion.



Warning: Please do not remove the 15-pin cable when the ExpressCard is inserted in the ExpressCard slot and the host computer is powered. The 15-pin connector is not designed to support hot-plugging, so it cannot be disconnected while the system is running. The hot-plug feature is only supported by the ExpressCard connector and the Notebook's ExpressCard slot.

1. The driver files for Windows are shipped in a .zip format (eg. V409HS.zip). Please copy the files to your hard drive and unzip them, before proceeding with installation.

Please note: When installing the software for EC4S950, ensure that you browse to the correct operating system folder. Allowing Windows to search for the file may result in the incorrect file being installed, as the Driver CD contains several versions of the necessary software.

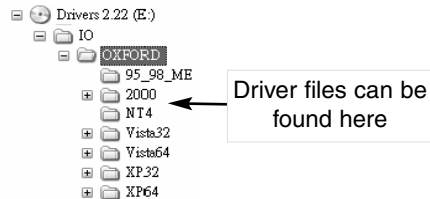

2. Connect the 15-pin cable of the Expansion Unit to the ExpressCard.
3. Insert the ExpressCard into an unused ExpressCard slot on the host computer. This will launch the **Add New Hardware Wizard**. Click on **Next**.
4. Select **Install from a list or specific location (Advanced)** and click **Next**.
5. Select **Include this location in the search**, then click on **Browse** to specify the exact file location (E:\IO\OXFORD\NT4 etc.) and click **Next** to continue. Please note that if the exact file is not selected, an installation conflict could occur. Please pay particular

attention to the folder name, when browsing to the destination file.

6. Click **Next** to continue and click **Finish** to complete the installation.
7. Right-click on the **My Computer** icon, and select **Manage**. Choose **Device Manager** (in the left pane), and double-click on **Ports** (in the right pane).
8. Right-click on one of the newly added ports, and choose **Properties**. Click on the **Data rate** tab, then click on **Detect Crystal Frequency**. Click **OK** to save this setting.
9. Repeat step 9 for each added port.
10. Serial devices can be connected, once the preceding steps are complete.

Safely removing the ExpressCard

Please note that in Windows XP and 2000, when the ExpressCard is connected to the host computer, an icon (depicted below) will appear in the taskbar (normally the bottom right-hand corner of the screen, near the clock). To ensure safe removal of the ExpressCard, please click on this icon, select **Stop**, click **OK** and then **Close**, after which you can safely remove the ExpressCard from the host computer.



Specifications

Certifications	ROHS, FCC, CE
Bus Type	ExpressCard
Form Factor	34mm
Connectors	4 x DB9 Male 1 x 15 pin to four DB9 ports
Maximum Data Transfer Rate	921 Kbps
OS Support	Windows® 8 (32/64bit), 7 (32/64), Vista (32/64), XP (32/64), 2000, Windows Server® 2003 (32/64)

Accessory Products from StarTech.com

Contact your local StarTech.com dealer or visit www.startech.com for cables or other accessories that will help you get the best performance out of your new product.



MC3MF
3 ft. AT Modem Cable DB9F-DB25M



MC6MF
6 ft. AT Modem Cable (male to female)



MXT100_25
25 ft. 9-pin Straight Through Cable (male to female)



AT925FF
Adapter DB9F to DB25F



AT925FM
Adapter DB9F to DB25M



PEX2EC
PCI-Express to ExpressCard Adapter

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit **www.startech.com/support** and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a lifetime warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

About StarTech.com

StarTech.com is “The Professionals’ Source for Hard-to-Find Computer Parts”. Since 1985, we have been providing IT professionals with the quality products they need to complete their solutions. We offer an unmatched selection of computer parts, cables, server management solutions and A/V products and serve a worldwide market through our locations in the United States, Canada, the United Kingdom and Taiwan.

Visit **www.startech.com** for complete information about all our products and to access exclusive interactive tools such as the Parts Finder and the KVM Reference Guide. StarTech.com makes it easy to complete almost any IT solution. Find out for yourself why our products lead the industry in performance, support, and value.