

4x4 VGA Matrix Switch with Audio

ST424MX



DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction.....	1
Package Contents.....	2
Specifications.....	2
Technical Specifications.....	3
Front View.....	3
Rear View.....	3
Installation.....	4
Operation	4
Operation for Cascade.....	6
Technical Support.....	7
Warranty Information.....	7

Introduction

Using the ST424MX Audio/Video Matrix, you can transmit audio and video signals to up to four screens, and four sets of speakers. The SmartView AV Matrix also allows you to select between four PC's when choosing an input signal to transmit.

The ST424MX Audio/Video Matrix is ideal for:

- Test Bench Facilities
- Data Centers
- Help Desks
- Video Broadcasting
- Educational Facilities

Features

- Intelligent functionality
- 350 MHz pixel frequency
- Supports VGA, SVGA, UXGA, and QXGA resolutions.
- Supports Multi-Sync video types including RGBHV, RGsB and RGbS
- Supports
- Supports
- Four 7-Segment LED's indicate the status of input ports
- VGA card-compatible output
- Extends video signals up to 65 meters (213 feet)
- 20Hz~20KHz Audio Frequency Response
- Support synchronous Include positive, negative; TTL or 1Vpp level.
- Supports the DDC, DDC2, DDC2B.
- The switches on panel can select PC signal source 1 ~ 4 as OUT 1 ~ 4 or turning off any signal I/O port / all I/O ports
- Can be cascaded

Package Contents

- 1 x SmartView ST424MX Audio/Video matrix
- 1 x User Manual
- 1 x DC 12V 1.25A Power Adapter
- 2 x Rack Rails
- 8 x Screws


Specifications

Function	ST424MX
Video Input Connector	4x HD-15 Female
Video Output Connector	4x HD-15 Female
Audio Input Connector	4x 3.5 Stereo Jack
Audio Output Connector	4x 3.5 Stereo Jack
Select Switch	10
7-Segment LED	4
Max. Resolution	1920x1440 @ 85 Hz
Pixel Frequency	350 MHz
Cable Distance (Device to Monitor)	65m (213 feet) Max.
Power Adapter (Min.)	DC 12V 1.25A
Housing	Metal
Weight	1065 g
Dimensions (LxWxH)	269x108x42 mm

Technical Specifications

Pin	Signal	Pin	Signal
1	Red video	9	NC
2	Green video	10	Ground
3	Blue video	11	NC
4	NC	12	ID1
5	Ground	13	Horizontal sync
6	Analog ground	14	Vertical sync
7	Analog ground	15	ID3
8	Analog Ground		

Front View



Rear View




Installation

1. Ensure that the PCs, screens, and speakers being used are powered off.
2. Use the HD-15 image and 3.5mm audio extension cables to connect the VGA interface and PC audio card to the "Video In" and "Audio In" ports of the Audio/Video Matrix.
3. Use the HD-15 image and 3.5mm audio extension cables to connect a screen, speaker, or headphones to the "Video Out" and "Audio Out" of the Audio/Video Matrix.
4. Connect the Audio/Video Matrix to a power supply.
5. Turn on the PC's, screens and speakers being used.
6. Use the control switches (ie. Out1, Out2, etc) to select which audio and video signals the Audio/Video Matrix will broadcast.

Operation

1. When you press button "Out1" or "Out2" or "Out3" or "Out4", the corresponding Out 7-Segment LED will start flashing for 3 seconds. There are total three switching methods:
 - a. Press button "In1" or "In2" or "In3" or "In4" within 3 seconds to make 7-Segment LED stop flashing and change its display to the number of Input port you set. Then the Output port will switch to the corresponding Input port.
 - b. Press button "OFF" within 3 seconds to make 7-Segment LED stop flashing and display "0". Then this Output port will be turned off.
 - c. If you don't press any button within 3 seconds, the 7-Segment LED will stop flashing and keep displaying original number and setting of Output port.
 - d. If you press button "Out1" or "Out2" or "Out3" or "Out4" within 3 seconds, then Out 7-Segment LED will start flashing for 3 seconds again to wait for button "In1" or "In2" or "In3" or "In4", "OFF" pressed.
2. When you press button "All", all 7-Segment LED will start flashing for 3 seconds. There are total three switching methods:
 - a. Press button "In1" or "In2" or "In3" or "In4" within 3 seconds to make all 7-Segment LED stop flashing and change their displays to the number of Input ports you set. Then all Output ports will switch to the corresponding Input ports
 - b. Press button "OFF" within 3 seconds to make all 7-Segment LED stop flashing and display "0". Then all Output ports will be turned off.
 - c. If you don't press any button within 3 seconds, all 7-Segment LED will stop flashing and keep displaying original number and setting of Output port.
 - d. If you press button "All" within 3 seconds, then all Out 7-Segment LED will start flashing for 3 seconds again to wait for button "In1" or "In2" or "In3" or "In4", "OFF" pressed.

Operation for Cascade

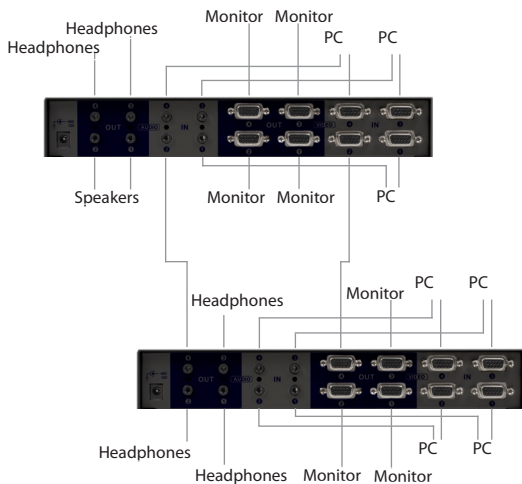

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

StarTech.com

Hard-to-find **made easy**®

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit **www.startech.com** for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.