


## 6U 13.75 in. Deep Wall-Mount Bracket for Patch Panels

### Product Diagram (WALLMOUNT6)

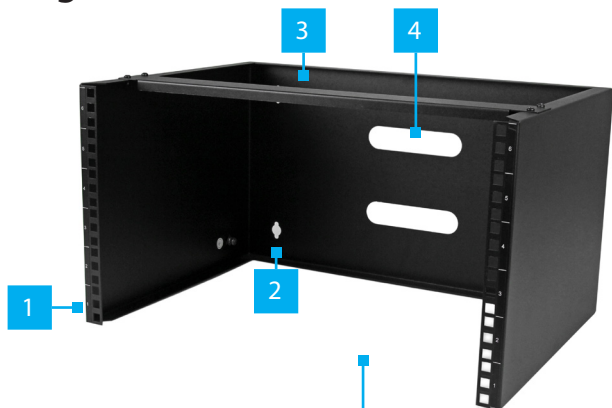

Component	Function
1 Cage Nut Holes	• Used with <b>Cage Nuts</b> for mounting equipment into the <b>Wall Mount Rack</b> .
2 Installation Holes (x 4)	• Used to wall mount the <b>Wall Mount Rack</b> .
3 Stabilizer Bar	• Used to stabilize the <b>Wall Mount Rack</b> when equipment is loaded.
4 Cable Management Holes (x 2)	• Used to route the equipment cables.

### Requirements

For the latest requirements, please visit [www.startech.com/WALLMOUNT6](http://www.startech.com/WALLMOUNT6)

### Packaging contents

- 6U Wall Mount Rack x 1
- M5-25 mm Flat-Head Screws x 4
- Plastic Anchors x 4
- Stabilizer Bar x 1
- M4-8 mm Self-Tapping Bracket Screws x 4
- M6 Cage Nuts x 12
- M6 Screws x 12

- M6 Lock Washer x 1
- M6 Flat Washer x 1
- M6 Nut x 1
- Quick-Start Guide x 1

### Mounting the Wall Mount

**Warning!** The **Wall Mount Rack** can support up to 44.2 lb (20 kg). If you exceed the weight limit, the **Wall Mount** may not function as expected.

**Note:** The installation holes for wall mounting are 16 in. on center to allow for wall-stud mounting.

1. Align the **Mounting Holes** (2 per side) on the **Stabilizer Bar** with the four **Mounting Holes** on the **Wall Mount Rack**.
2. Insert the four **M4-8 mm Bracket Screws** through the **Mounting Holes** in the **Stabilizer Bar** and into the **Mounting Holes** on the **Wall Mount Rack**.
3. Using a **Screwdriver** tighten the **M4-8 mm Bracket Screws** to secure the **Stabilizer Bar** to the **Wall Mount Rack**.
4. Find the wall studs in the wall where you want to attach the **Wall Mount Rack**.
5. Insert the four **M5-25 mm flat-head screws** through the **installation holes** on the **Wall Mount** and then into the studs in the wall.

**Note:** If you attach the **Wall Mount Rack** using wall studs, you don't need to use the plastic anchors.

### Mounting the Wall Mount Using Plastic Anchors

**Warning!** The **Wall Mount** can support up to 44.2 lb (20 kg). If you exceed the weight limit, the **Wall Mount** may not function as expected.

1. Align the **Mounting Holes** (2 per side) on the **Stabilizer Bar** with the four **Mounting Holes** on the **Wall Mount Rack**.
2. Insert the four **M4-8 mm Bracket Screws** through the **Mounting Holes** in the **Stabilizer Bar** and into the **Mounting Holes** on the **Wall Mount Rack**.
3. Using a **Screwdriver** tighten the **M4-8 mm Bracket Screws** to secure the **Stabilizer Bar** to the **Wall Mount Rack**.
4. Align the **Plastic Anchors** with the **Installation Holes** on the **Wall Mount Rack**.


- Determine where on the wall you want to attach the **Wall Mount Rack**.
- Using a **Hammer** install the **Plastic Anchors** into the wall.
- Insert the four **M5-25 mm Flat-Head screws** through the **Installation Holes** on the **Wall Mount Rack** and into the **Plastic Anchors** in the wall.

## Adding Equipment to the Wall Mount


- Use the included **M6 Cage Nuts, Screws, and Washers** to install equipment in the **Wall Mount Rack**.

## Dimensions

### Interior Dimension

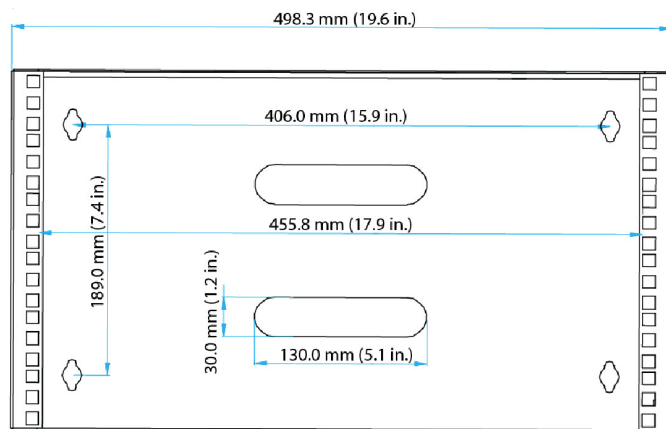

### Exterior Dimensions

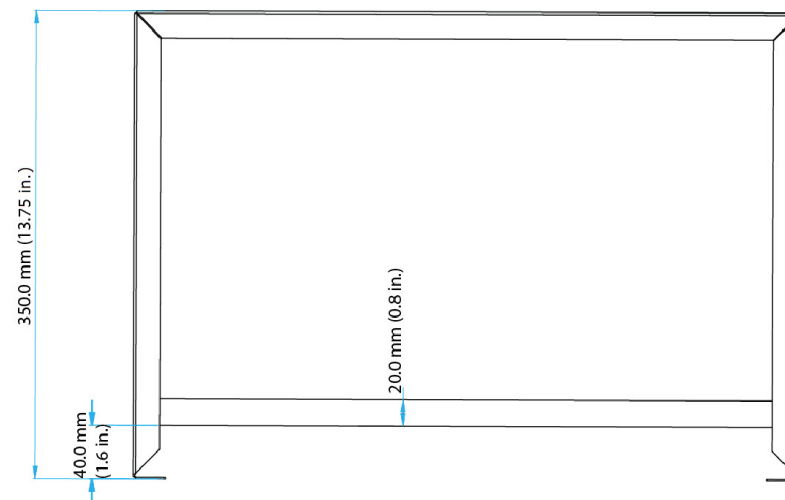

### FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

### Warranty Information

This product is backed by a lifetime warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

### Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

### Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas toucher le produit lorsqu'il est sous tension.

### 安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

### Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

### Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

### StarTech.com Ltd.

45 Artisans Cres  
London, Ontario  
N5V 5E9  
Canada

### StarTech.com LLP

2500 Creekside  
Parkway  
Lockbourne, Ohio  
43137  
U.S.A.

### StarTech.com Ltd.

Unit B, Pinnacle 15  
Gowerton Rd,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)