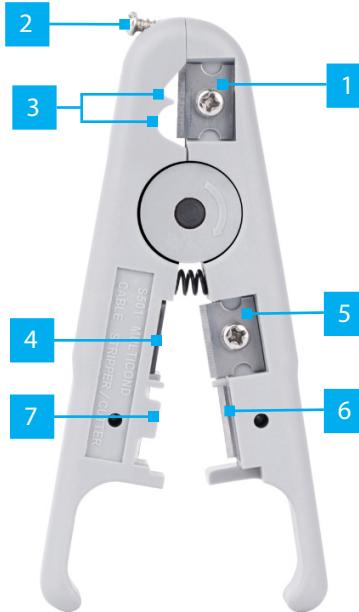


Professional Network Cable Stripper and Cutter

Product ID
CABLESTRIPCUT

Component	Function
1	Cable Stripping Blade <ul style="list-style-type: none">Removes Cable Outer Jacket and Insulation
2	Adjustment Screw <ul style="list-style-type: none">Adjusts the Clamping Height of the Cable Stripping BladeFits up to 0.29in (7.5mm) Cable Diameter
3	Cable Stripping Slots <ul style="list-style-type: none">V-shaped Slot: fits small cablesU-shaped Slot: fits large cables
4	Cable Cutting Slot <ul style="list-style-type: none">Flat surface for precise cuttingFits Round and Flat Cables
5	Cable Cutting Blade <ul style="list-style-type: none">Cut the cable to the exact length
6	Flat Cable Stripping Blade <ul style="list-style-type: none">Removes Flat Cable Outer Jacket
7	Flat Cable Stripping Slot <ul style="list-style-type: none">Position the Flat Cable between the Flat Cable Stripping Blades

Product Information

For the latest product information, technical specifications, and declarations of conformance, please visit: www.Startech.com/CABLESTRIPCUT

Requirements

- UTP/FTP/STP Cables, Coax cables, Multi-conductor cables
- Cable Diameter: 3.5mm to 7.5mm (0.13in to 0.29in)
- Phillips Head Screwdriver

Package Contents

- Cable Stripper and Cutter x 1
- Quick-Start Guide x 1

Operation

Cable Stripping and Jacket Removal

Round Cable Stripping

- Insert a **Round Cable** into the **Cable Stripping Slot**. Ensure that the cable fits snugly between the **Cable Stripping Slot** and the **Cable Stripping Blade**.
Note: Insert small cables in the V-shaped Cable Stripping Slot
- For larger cables, turn the **Adjustment Screw** clockwise using a **Phillips Head Screwdriver** to raise the **Clamping Height** of the **Cable Stripping Blade**. Insert the large cable into the U-shaped Slot.
- Rotate The **Cable Stripper and Cutter** around the **Round Cable** to strip off the **Cable Outer Jacket** and/or **Insulation**. Ensure that even pressure is applied when rotating the **Cable Stripper and Cutter**.
- Check the stripped area to ensure that the **Cable Jacket/Insulation** is fully removed.

Flat Cable Stripping

- Position a **Flat Cable** into the **Flat Cable Stripping Slot**. Ensure that the cable fits snugly between the **Flat Cable Stripping Blades**.
- Close the **Flat Cable Stripping Blades** together into the **Flat Cable Jacket**. Gently pull away from the cable to remove the **Cable Jacket**.
- Check the stripped area to ensure that the **Cable Jacket/Insulation** is fully removed.

Cable Cutting

- Position a cable in the **Cable Cutting Slot**.
- Press the **Cable Cutting Blade** downward with the handle, to cut across the cable.
- Check the cut end of the cable to ensure a clean cut without frays.

Regulatory Compliance

EU REACH Declaration

This product complies with the Registration, Evaluation, Authorisation, and Restriction of Chemicals (REACH) Regulation (EC) of the European Parliament and the Council. The product does not contain any of the Substances of Very High Concern (SVHC) or Restricted Substances above the threshold values declared by the European Agency for Chemicals (ECHA) on their website's documented/maintained lists.

UK REACH Declaration

This product is compliant with the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) Regulation (EC) No. 1907/2006 of the European Parliament and of the Council. The product does not contain any of the Substances of Very High Concern (SVHC) or Restricted Substances above the threshold values declared by the European Agency for Chemicals (ECHA) on the documented/maintained lists located on their website.

This product will meet all UK REACH requirements when they are ratified, and StarTech.com is committed to provide our customers with information about the chemical substances in our products according to UK REACH regulation.

Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.



Points de collecte sur www.quefairedesmesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

StarTech.com
Ltd.
45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp