


## Flat-Screen TV Wall Mount - For 32 in. to 75 in. LCD, LED, or Plasma TVs

FLATPNLWALL

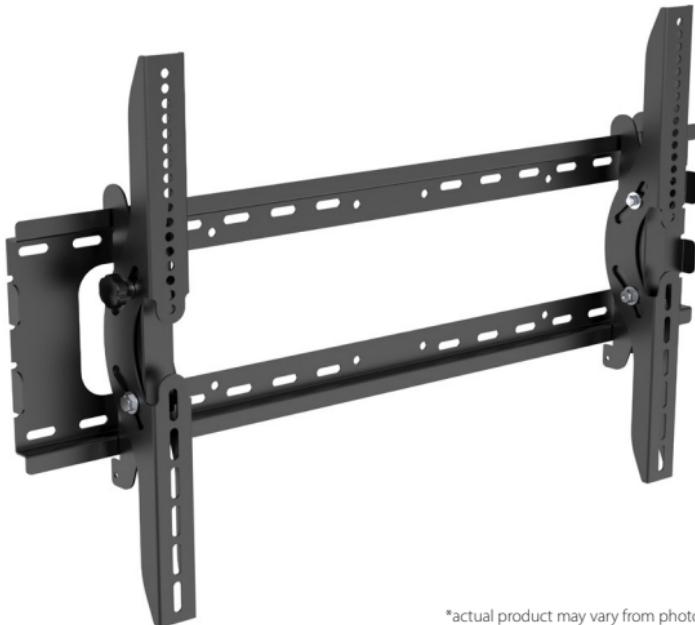

\*actual product may vary from photos

**FR:** Guide de l'utilisateur - [fr.startech.com](http://fr.startech.com)

**DE:** Bedienungsanleitung - [de.startech.com](http://de.startech.com)

**ES:** Guía del usuario - [es.startech.com](http://es.startech.com)

**NL:** Gebruiksaanwijzing - [nl.startech.com](http://nl.startech.com)

**PT:** Guia do usuário - [pt.startech.com](http://pt.startech.com)

**IT:** Guida per l'uso - [it.startech.com](http://it.startech.com)

**JP:** 取扱説明書 - [jp.startech.com](http://jp.startech.com)

For the latest information, technical specifications, and support for this product, please visit [www.Startech.com/FLATPNLWALL](http://www.Startech.com/FLATPNLWALL).

## Warning statements

Make sure to assemble this product according to the instructions. Failure to do so might result in personal injury or property damage.

Make sure that the weight of the monitor doesn't exceed the weight capacity of this product. If you exceed the weight capacity, you might experience personal injury or damage to the equipment. This product can support the following weight: Up to 75 kg (165 lb).

Never operate this product if parts are missing or damaged.

The wall mount is designed to be installed on a wood stud, solid concrete, or cinder block wall. The wall structure should also be capable of supporting at least four times the weight of the mounted equipment. The mounting hardware included with this product may not be adequate for installation on certain wall structures. Failure to comply to these warnings may result in personal injury or damage to the equipment.

The mounting hardware included with this product might not be adequate for some wall structures. If you lack the necessary expertise to attach this product to the wall structure that you're using, contact a construction professional to install the wall mount or to provide specific mounting instructions for your wall structure.

## Dichiarazioni di avvertenza

Assemblare il prodotto rispettando le istruzioni. Il mancato rispetto delle istruzioni potrebbe causare danni a persone o proprietà.

Verificare che il peso del monitor non superi la capacità di supporto del prodotto. In caso di superamento della capacità di supporto potrebbero verificarsi danni a persone o apparecchiature. Il prodotto è in grado di supportare i seguenti pesi: 75 kg.

Non utilizzare il prodotto in presenza di parti mancanti o danneggiate.

Le caratteristiche dei muri sono variabili ed è importante verificare che la struttura muraria e l'hardware di montaggio in uso siano in grado di supportare adeguatamente le apparecchiature montate. Il mancato rispetto delle istruzioni potrebbe causare danni a persone o proprietà. La struttura muraria deve essere in grado di supportare un peso almeno quattro volte superiore a quello dell'apparecchiatura montata.

L'hardware di montaggio incluso con il prodotto potrebbe non essere adeguato ad alcune strutture murarie. Se l'utente non dispone delle competenze necessarie per agganciare il prodotto alla struttura muraria in uso, dovrà contattare un professionista edile per installare il supporto a parete o ottenere istruzioni di montaggio per la struttura muraria in uso.

## Avertissements

Assemblez ce produit conformément aux instructions. Si vous ne respectez pas ces instructions, vous risquez de vous blesser ou d'endommager l'équipement.

Vérifiez que le poids du moniteur ne dépasse pas la capacité pondérale du produit. Si vous dépassez la capacité pondérale, vous risquez des blessures corporelles ou des dommages matériels. Ce produit peut supporter de 75 kg.

N'utilisez pas ce produit si des pièces sont endommagées ou manquantes.

Les structures des murs varient. Vous devez impérativement vérifier que le type de mur et le matériel de fixation que vous utilisez permettent de soutenir correctement l'équipement. Dans le cas contraire, vous risquez des blessures corporelles ou des dommages matériels. La structure du mur doit pouvoir supporter au moins quatre fois le poids de l'équipement monté.

Le matériel de fixation inclus avec ce produit n'est pas forcément approprié pour toutes les structures de murs. Si vous ne disposez pas des compétences nécessaires pour installer ce produit au mur, contactez un professionnel afin qu'il installe le support mural ou qu'il vous fournisse les instructions de montage spécifiques à votre structure de mur.

## Warnhinweise

Montieren Sie dieses Produkt gemäß den Anweisungen. Andernfalls kann dies zu Verletzungen von Personen oder Schäden an Eigentum führen.

Das Gewicht des Monitors darf die zulässige Traglast des Produkts nicht übersteigen. Wenn die Traglast überschritten wird, kann dies zu Verletzungen von Personen oder Schäden an Geräten führen. Dieses Produkt ist für folgendes Gewicht geeignet: 75 kg.

Das Produkt darf nicht bedient werden, wenn Teile fehlen oder beschädigt sind.

Wandstrukturen unterscheiden sich, und es muss sichergestellt werden, dass die Wand und das verwendete Montagematerial das montierte Gerät halten kann. Andernfalls kann dies zu Verletzungen von Personen und/oder Schäden an Geräten führen. Die Wand muss mindestens das Vierfache des Gewichts des montierten Geräts halten können.

Das integrierte Montagematerial ist möglicherweise nicht für jede Wand geeignet. Wenn Ihnen die nötigen Fachkenntnisse zum Anbringen dieses Produkts an einer Wand fehlen, lassen Sie einen Fachmann den Wandhalter anbringen, oder lassen Sie sich vom einem Fachmann Montageanweisungen für Ihre Wand erteilen.

## Waarschuwingen

Zorg dat dit product volgens de instructies in elkaar wordt gezet. Indien dit niet goed gebeurt kan lichamelijk letsel of materiële schade ontstaan.

Zorg dat het gewicht van het scherm de maximale capaciteit van dit product niet overschrijdt. Als u de gewichtscapaciteit overschrijdt, kan persoonlijk letsel of schade aan de apparatuur ontstaan. Dit product ondersteunt het volgende gewicht: 75 kg.

Gebruik dit product nooit als er onderdelen ontbreken of beschadigd zijn.

Ondanks wanden verschillen, is het belangrijk dat u ervoor zorgt dat het type wandstructuur en de montagemiddelen die u gebruikt de gemonteerde apparatuur goed ondersteunen. Indien u dit niet doet kan lichamelijk letsel en/of schade aan de apparatuur ontstaan. De wandstructuur moet voldoende zijn om ten minste vier keer het gewicht van de gemonteerde apparatuur te ondersteunen.

De bij dit product geleverde montagemiddelen kunnen niet geschikt zijn voor sommige wandstructuren. Als u onvoldoende kennis hebt om dit product aan de door u gebruikte wandstructuur te bevestigen, neem dan contact op met een bauwonderviseur om de steun aan de muur te installeren of specifieke montage-instructies voor uw wandstructuur te geven.

## Varsningsmeddelanden

Om att du monterar produkten i enlighet med instruktionerna. Om du inte gör det kan skada på personer eller egendom uppstå.

Se till att skärmens vikt inte överstiger produktens viktkapacitet. Om viktkapaciteten överstigs kan skada på person eller utrustning uppstå. Denna produkt har stöd för följande vikt: 75 kg.

Använd aldrig produkten om delar saknas eller är skadade.

Eftersom väggstrukturer varierar är det viktigt att kontrollera att väggstrukturen och monteringsutrustningen som du använder klarar av den monterade utrustningen. Om du inte gör det kan skada på person eller/eller utrustning uppstå. Väggstrukturen ska kunna klara av minst fyra gånger vikten av den monterade utrustningen.

Monteringsutrustningen som medföljer produkten kanske inte är lämplig för vissa väggstrukturen. Om du saknar nödvändiga länkspärer för att fästa denna produkt på väggstrukturen som du använder, kontakta en professionell konstruktör för att installera väggmonteringen eller för att ge specifika monteringsinstruktioner för din väggstruktur.

## Mensagens de aviso

Certifique-se de que monta este produto de acordo com as instruções. O incumprimento pode resultar em ferimentos pessoais ou danos de propriedade.

Certifique-se de que o peso do monitor não excede a capacidade de peso deste produto. Se exceder a capacidade de peso, pode sofrer ferimentos pessoais ou danos no equipamento. Este produto pode suportar o seguinte peso: 75 kg.

Nunca opere este produto se faltarem peças ou estas estiverem danificadas.

As estruturas de parede variam e é importante certificar-se de que o tipo de estrutura de parede e hardware de montagem que está a usar irá suportar corretamente o equipamento. O incumprimento pode resultar em ferimentos pessoais ou danos de propriedade. A estrutura de parede deve ser capaz de suportar pelo menos quatro vezes o peso do equipamento montado.

O hardware de montagem incluído com este produto pode não ser adequado para algumas estruturas de parede. Se não tiver o conhecimento necessário para fazer este produto a estrutura de parede que está a usar, contacte um profissional de construção para fazer a instalação em parede ou para fornecer instruções de montagem específicas para a sua estrutura de parede.

## Advertencias de uso

Asegúrese de ensamblar este producto según las instrucciones. De lo contrario, pueden producirse lesiones personales o daños en la propiedad.

Asegúrese de que el peso del monitor no excede la capacidad de carga de esta producto. Si se excede dicha capacidad se podrán producir lesiones personales o daños en el equipo. Este producto tiene la siguiente capacidad de carga: 75 kilogramos.

Nunca opere o ponga en funcionamiento este producto si faltan piezas o hay daños en las mismas.

Las estructuras de las paredes pueden variar y, por tanto, es importante determinar con certeza el tipo de estructura de la pared y el hardware de montaje que se va a utilizar para poder soportar el peso del equipo. De lo contrario, se pueden producir lesiones personales o daños en el mismo. La estructura de la pared debe ser capaz de soportar al menos cuatro veces el peso del componente instalado.

El hardware de montaje incluido con este producto puede no ser adecuado para algunas estructuras de pared. Si no tiene la experiencia suficiente para fijar este producto a la estructura de la pared correspondiente, póngase en contacto con un profesional de la construcción para instalar el soporte de pared o para que le proporcione las instrucciones específicas de montaje para su estructura de pared.


# Table of Contents


Warnings .....	i
<b>Introduction .....</b>	<b>1</b>
Product diagrams.....	1
Technical specifications .....	3
Package contents .....	4
Requirements .....	6
<b>Installation .....</b>	<b>6</b>
Attach the wall plate to the wall.....	6
Select the appropriate mounting hardware .....	7
Attach the brackets to the TV .....	8
Attach the TV to the wall plate.....	10
Adjust the tilt of the TV .....	11
<b>Technical support.....</b>	<b>12</b>
<b>Warranty information.....</b>	<b>12</b>

# Introduction

THE FLATPNLWALL offers a sturdy way to wall-mount any flat-panel TV ranging from 32 to 75 in. in size. The wall mount supports televisions that weigh up to 75 kg (165 lb.).

## Product diagrams

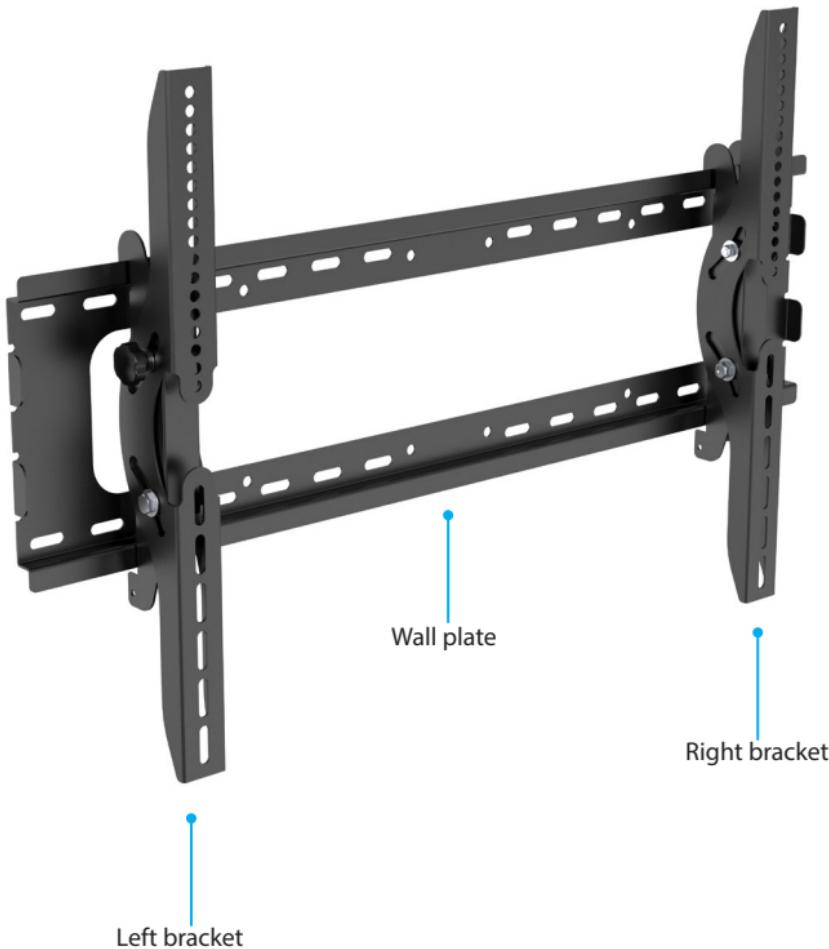

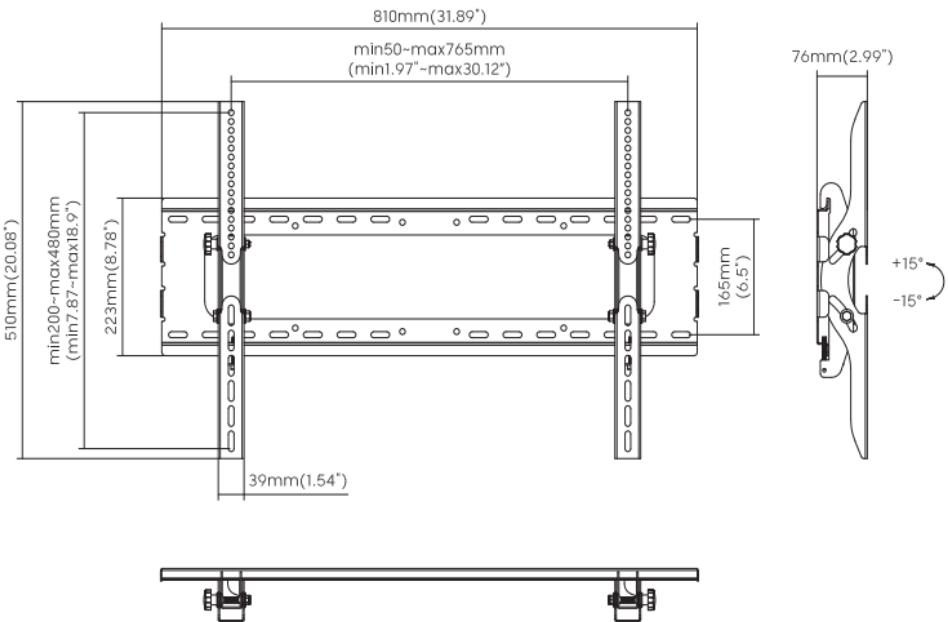


# Technical specifications

Type of measurement	Measurement
VESA mounting hole pattern	100x100, 100x200, 200x200, 200x300, 200x400, 300x200, 300x300, 400x200, 400x300, 400x400, 600x200, 600x300, 600x400
Weight capacity	Up to 165 lb. (75 kg)
Tilt	+15° to -15°
Screen size	813 to 1905 mm (32 to 75 in.)

## Package contents

1



Wall plate

Qty: One

2



Left bracket

Qty: One

3



Right bracket

Qty: One

4



Allen key

Qty: One

5



M5x14 mm screws

Qty: Four



M6x14 mm screws

Qty: Four

6



M6x30 mm screws


Qty: Four



M8x30 mm screws

Qty: Four

9



M8x50 mm screws

Qty: Four

11



Short spacers

Qty: Eight

13



6.3x55 mm screws

Qty: Six

15




Flat washers

Qty: Six

Instruction manual

10



Washers

Qty: Four

12



Long spacers

Qty: Eight

14



Concrete anchors

Qty: Six

16



Instruction manual

Qty: One

## Requirements

- A flat-panel TV that is compatible with a VESA mount
- A Phillips screwdriver

Requirements are subject to change. For the latest requirements, please visit [www.StarTech.com/FLTPNLWALL](http://www.StarTech.com/FLTPNLWALL).

## Installation

**⚠ Warning!** Make sure that the weight of the TV doesn't exceed the weight capacity of this product. If you exceed the weight capacity, you might experience personal injury or damage to the product. This product can support the following weight: Up to 75 kg (165 lb.).


### Attach the wall plate to the wall

**⚠ Warning!** The wall mount is designed to be installed on a wood stud, solid concrete, or cinder block wall. The wall structure should be capable of supporting at least four times the weight of the mounted equipment. The mounting hardware included with this product may not be adequate for installation on certain wall structures. If you lack the necessary expertise to attach this product, contact a construction professional to install the wall mount or to provide specific mounting instructions for your wall structure. Failure to do so may result in personal injury and/or equipment damage.

1. Use a pencil to mark the location on the wall where you want to attach the wall mount.

**Note:** You can use the holes or slots on the wall mount to attach it to the wall.

2. Follow the appropriate steps for the type of wall that you're attaching the mount to and attach the wall plate (1) to the wall.



## Select the appropriate mounting hardware

To accommodate different TV designs, the FLATPNLWALL comes with three sets of screws of different lengths and diameters, and two sizes of spacers.

To select the combination of mounting hardware that you need to use to attach the brackets to the TV, complete the following:

- Determine whether the back of the TV is flush or inset.
- Determine the depth of the mounting holes on the TV.
- Determine the diameter of the mounting holes on the TV.
- Consult the images below to see the different hardware combinations available, and select the one that works best with your TV.

**Note:** If you're using a TV with a flush mounting surface, you don't need to use any of the provided spacers.

The following screw sizes work with a **flush mounting surface**:

M5x14 mm



M6x14 mm



The following hardware combinations work with an **Inset mounting surface**:

M6x30 mm



M8x30 mm




or



or




or



*continued on next page*

(continued from previous page)


The following hardware combinations work with an **inset mounting surface**:

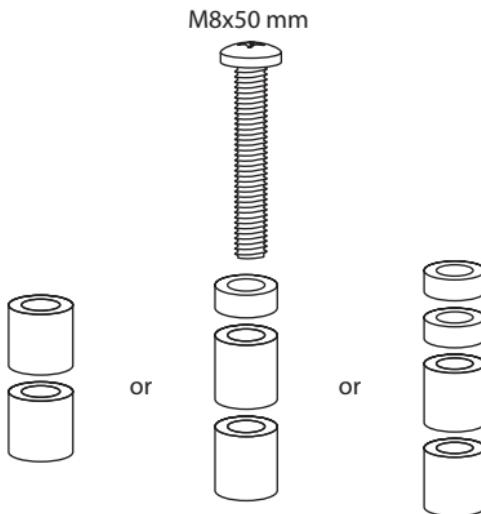

## Attach the brackets to the TV

When you attach the brackets to the TV, make sure that the knobs on the brackets face outwards. (figure 1)


figure 1

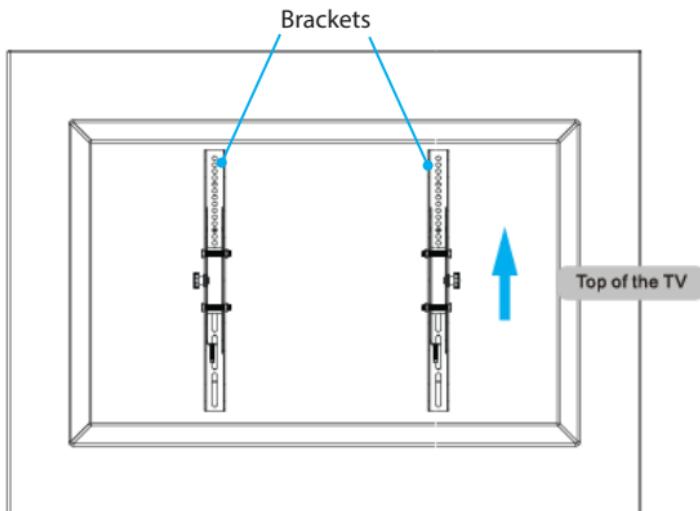

**Warning!** Do not over-tighten the screws. If you encounter resistance while you're tightening the screws, stop tightening. Failure to do so could result in damage to the TV.

1. If you're attaching a TV with an inset mounting surface, place the spacers over the mounting holes on the back of the TV.
2. With the knobs facing outwards, position the left (2) and right (3) brackets so that the holes on the brackets line up with the mounting holes or spacers on the back of the TV.
3. Position the four washers (10) over the holes on the left and right brackets. (figure 2)
- Note:** There are small and large holes in the washers to accommodate different screw sizes.
4. Insert the screws into the washers, the left and right brackets, the spacers (if required), and into the back of the TV.
5. Use a screwdriver to tighten the screws. (figure 2)

figure 2

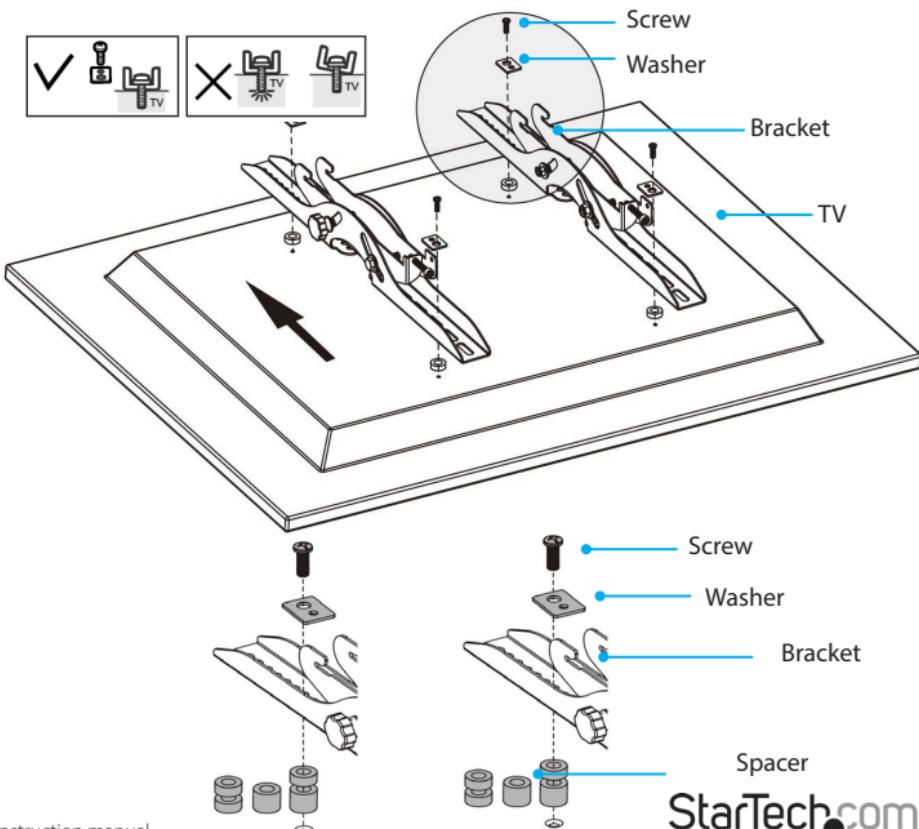

## Attach the TV to the wall plate

**Warning!** Attaching the TV is a two-person job. Do not attempt to hang the TV by yourself.



Carefully lift up the TV and hook the mounting hardware on the left (2) and right (3) brackets onto the wall plate (1). (figure 3)

1. Use the Allen key (4) and tighten the screws in the bottom of the mounting hardware in both of the brackets. (figure 4)

figure 3



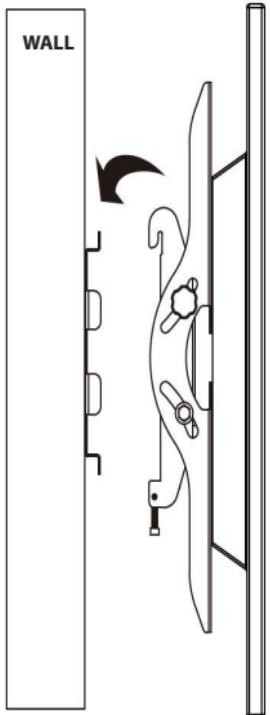



figure 4

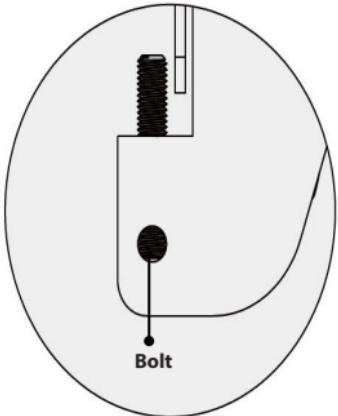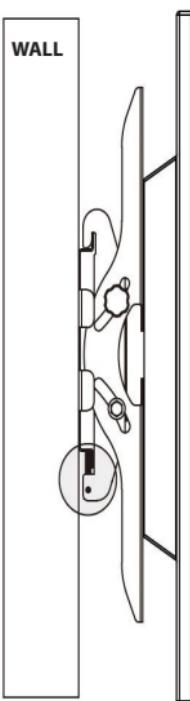

## Adjust the tilt of the TV

1. To adjust the tilt of the TV, loosen the tilt-adjusting knobs located on the side of each of the brackets. (figure 5)
2. Adjust the TV to the angle that you want it to be at, and then tighten the tilt-adjusting knobs.

*figure 5*

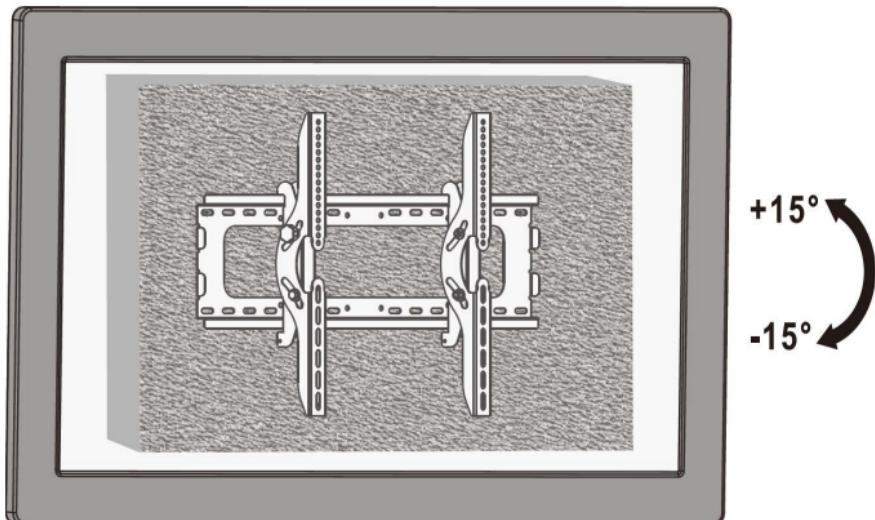

# Technical support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

## Warranty information

This product is backed by a five-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

## Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit [www.startech.com](http://www.startech.com) for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

### Reviews

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.



StarTech.com Ltd.

45 Artisans  
Crescent  
London, Ontario  
N5V 5E9  
Canada

StarTech.com LLP

4490 South  
Hamilton Road  
Groveport, Ohio  
43125  
U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15  
Gowerton Road  
Brackmills,  
Northampton  
NN4 7BW  
United Kingdom

StarTech.com Ltd.

Siriusdreef 17-27  
2132 WT  
Hoofddorp  
The Netherlands

FR: [fr.startech.com](http://fr.startech.com)

DE: [de.startech.com](http://de.startech.com)

ES: [es.startech.com](http://es.startech.com)

NL: [nl.startech.com](http://nl.startech.com)

IT: [it.startech.com](http://it.startech.com)

JP: [jp.startech.com](http://jp.startech.com)