


7.1 Channel PCI Digital Surround Sound Card - 24 bit

PCISOUND7

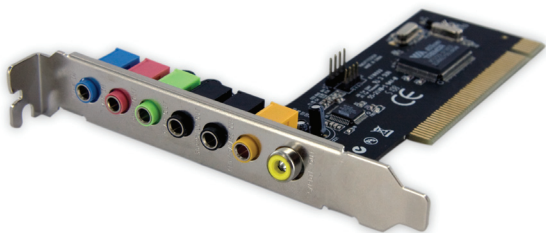

*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction	1
Packaging Contents	1
System Requirements.....	1
Installation	2
Hardware Installation	2
Driver Installation.....	2
Physical Layout	3
Specifications	4
Technical Support	5
Warranty Information	5

Introduction

This high quality 7.1 surround sound PCI sound card is the ideal audio solution for gaming and media based computers, supporting full-duplex operation with 8 outbound streams and 2 simultaneous input streams.

Offering everything you need to take your multimedia experience to the next level, the 7.1 surround sound card supports the latest Dolby Digital EX and DTS 7.1 Channel DVD soundtracks, digital coax out, and 96Khz/24bit analog audio playback.

The PCI sound card includes Windows WDM supported drivers, which save both time and installation hassle, allowing you to add high quality 7.1 channel surround sound audio in minutes.

This high quality 7.1 Surround Sound card is backed by StarTech.com's 2-year warranty and free lifetime technical support.

Packaging Contents

- 7.1 Surround Sound PCI Card
- Driver CD
- Instruction Manual

System Requirements

- Available 5V PCI Slot
- Microsoft DirectX® 8.1 or later
- Microsoft Windows® 2000/XP/Server 2003/Vista (32/64-bit)/7 (32/64-bit)

Installation

It is recommended that you remove any previously installed sound card and drivers prior to installing this card to avoid any conflicts. If previously installed drivers are not removed, this sound card may not function properly.

Note: If your computer has on-board sound you will need to disable it on the motherboard. For more information please see your computer's documentation or contact your computer's manufacturer.

Hardware Installation


1. Turn your computer off and any peripherals connected to the computer (ie. Printers, external hard drives, etc.) Unplug the power cable from the rear of the power supply on the back of the computer.
2. Remove the cover from the computer case.
3. Locate an open PCI slot and remove the metal cover plate on the rear of the computer case.
4. Insert the card into the open PCI slot and screw the bracket to the rear of the case.
5. Place the cover back onto the computer
6. Insert the power cable into the socket on the power supply.

Driver Installation

(Windows 2000/XP/Server 2003/Vista/7)

1. Start up your computer, and place the Driver CD into the CD-ROM drive.
2. Click the Start button on the taskbar and click Run. Type "D:\SOUND\VT1723\setup.exe". (Assuming you have placed the CD in CD-ROM drive labeled as D).
3. Follow any on-screen instructions to complete the software installation.
4. Restart your system.
5. Once you have rebooted the computer, the sound card will be ready to use.

Physical Layout

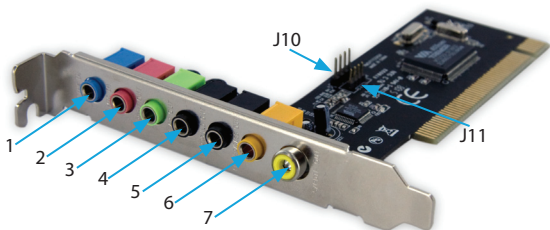

1. Line in: Connect to tape/CD/DVD Player, or other audio sources for output mixing and/or recording.
2. MIC In: Connect to a microphone
3. Line Out: Connect to a headphone or a speaker. In 4-channel, 6-channel, and 8-channel configuration, the function of this port becomes Front Speaker Out.
4. Rear Speaker: Connect to Rear speakers while in 8 channel mode (via external amplifier).
5. Surround Speaker: Connect to Surround (side) speakers while 4/6/8 channel modes (via external amplifier).
6. Center/Bass Speaker: Connect to Center/Bass speakers while in 6/8 channel modes (via external amplifier).
7. S/PDIF OUT: The digital Output jack is an S/PDIF Coaxial output, you can use an RCA cable to connect this to a digital recorder, mixer or surround sound receiver. A 75 Ohm digital coaxial cable is required for this type of connection.

J10: Analog CD/IN header (L-G-G-R)

J11: Analog CD/IN header (G-R-G-L)

Specifications

Bus Interface	PCI rev 2.2 (5V)
External Connectors	6x 3.5mm mini-jack 1x RCA
Internal Connectors	2x Analog CD/IN Header
Chipset	VIA VT1723
Duplex Mode	Full Duplex: 8 output streams 2 input streams
Maximum Sampling Rate	Playback: 48Khz/24-bit Recording: 48Khz/16-bit
Compatible Operating Systems	Windows 2000/XP/Server 2003/Vista (32/64-bit)/7 (32/64-bit)

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.