

10/100 Mbps Ethernet Over Coaxial LAN Extender Kit - 2.4km

EOC110K

EOC110R



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction	1
System Requirements.....	1
Package Contents	1
Front View	2
Rear View.....	2
Installation	3
Hardware Installation	3
Driver Installation.....	3
Cable Lengths	4
Specifications.....	5
Technical Support	6
Warranty Information.....	6

Introduction

The StarTech.com EOC110K Ethernet over Coax extender kit allows you to span a 10/100 network over extremely long distances (up to 1.2km) while still maintaining high speed network connectivity. Allowing Ethernet connections over existing Coaxial cable with little to no modification, providing a perfect solution for a broad range of applications, including connecting isolated user stations from the same or separate building, or overcoming infrastructure obstacles and distances (e.g. older stone/ concrete architecture) where new wiring or wireless may be impossible.

System Requirements

- 10/100Mbps compatible Ethernet network/equipment
- Coaxial cabling (RG-59/6/7/11)
- Available AC power outlet at converter box locations

Package Contents


- 2 x Ethernet over Coax converter box*
- 2 x Power Adapter*
- Instruction Manual

*EOC110R only contains one unit

Front View



Rear View

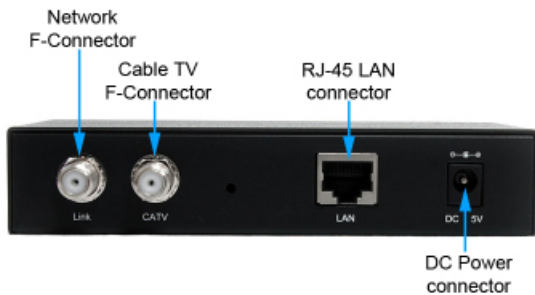

Installation

Hardware Installation

NOTE: Both of the converter boxes in the EOC110K kit are identical, so they can be installed at either end, in any order.

1. At one of the locations for the converter box, connect an RJ45 Ethernet cable from the existing Ethernet network or computer network adapter to the “LAN” port on the converter box.
2. Connect the coax cable to the “Link” F-Connector on the converter.
3. **OPTIONAL:** If also transmitting analog cable TV signals over the coax line, connect the CATV F-Connector to a TV or TV receiver. Digital cable TV signals are not supported.
4. Connect the included power adapter. The power LED should light up solid. The LAN Link/Act LED should light up solid when successfully connected to an Ethernet device on the “LAN” port.
5. Setup additional converter boxes by following the same Steps 1~4 for each location.
6. Once all units are setup, they should be able to automatically locate one another over the coax cabling. The Coax Link and Sync LEDs should stay solid once communication is established. The Coax Link LED will flash during communication.
7. The devices plugged into the “LAN” ports should now be able to communicate with one another freely.

Driver Installation

No driver or software installation is required for these converters on any connected computer systems.

Cable Lengths

Maximum bandwidth (Mbps) based on coaxial cable type and length.

Distance	RF Bandwidth	RG-59	RG-6	RG-7	RG-11
100m ~ 700m		144	144	144	144
800m		128	144	144	144
900m		112	144	144	144
1000m		96	128	144	144
1100m		80	128	144	144
1200m		64	112	128	144
1300m			80	128	144
1400m			80	128	144
1500m			64	112	144
1600m	< 30MHz			96	128
1700m				80	128
1800m				80	128
1900m				64	112
2000m					112
2100m					96
2200m					80
2300m					80
2400m					64

Specifications

Transmission Standards	ITU G.9954, IEEE802.3, IEEE802.3u, IEEE802.3x
Connectors (per unit)	2 x F-Connector female 1 x RJ45 female 1 x DC Power
LEDs (per unit)	1 x Power 1 x LAN Link/Activity 1 x Coax Link/Activity 1 x Coax Sync
Compatible Cabling	RG-59, 6, 7, 11
Maximum Distance	2400m (RG-11)
Power Adapter	5VDC, 2000mA, center positive, type M plug
Operating Temperature	0°C ~ 55°C (32°F ~ 131°F)
Storage Temperature	-10°C ~ 65°C (14°F ~ 149°F)
Humidity	10% ~ 90% RH
Dimensions (per unit)	280.0mm x 138.0mm x 76.8mm
Weight (per unit)	320g

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.