

## 2.5in SATA Removable Hard Drive Bay for PC Expansion Slot

S25SLOTR

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

\*actual product may vary from photos

### Packaging Contents

- 1 x S25SLOTR Removable Drive Bay
- 1 x 7-pin SATA cable
- 1 x LP4 to SATA power adapter and LED header
- 1 x Installation Guide
- 1 x Mounting Screw
- 1 x Hard Drive Protective Film

### System Requirements

- Available rear expansion slot (full height)
- 2.5" SATA Hard Drive or Solid State Drive



### Installation

1. Turn your computer off and any peripherals connected to the computer (ie. Printers, external hard drives, etc.). Unplug the power cable from the rear of the power supply on the back of the computer.
2. Remove the cover from the computer case.
3. Locate an open expansion slot and remove the metal cover plate on the rear of the computer case.
4. Place the Removable Drive Bay into the open expansion slot and screw the bracket to the rear of the case. It will straddle any expansion slot on the motherboard.
5. Connect the SATA data cable from the Removable Drive Bay to the SATA port on your hard drive controller.
6. Use the LP4 to SATA power adapter cable to connect an LP4 from the computer power supply to the SATA power connector on the Removable Drive Bay. Connect the 4-pin LED header from the adapter to the connector on the rack.
7. Place the cover back onto the computer.
8. Insert the power cable into the socket on the power supply.


## Specifications

<b>Bus Interface</b>	SATA I/II/III
<b>Internal Connectors</b>	7-pin SATA data, 15-pin SATA power, 4-pin LED header
<b>LEDs</b>	1 x Power/Activity
<b>Drive Compatibility</b>	2.5" SATA Drive, 7mm or 9.5 mm height
<b>Operating Temperature</b>	0° C - 55° C (32°F to 131°F)
<b>Dimensions</b>	120.0 mm x 145.0 mm x 21.0 mm
<b>Weight</b>	158.4 g


## How to Use

1. Slide the door latch gently and the bay door will spring open, then fully open the bay door. If a drive is currently in the bay, opening the door will eject the drive.
2. Place a drive into the bay opening and insert it 3/4 of the way in.
3. Close the door, which should insert the drive fully into the bay. The door latch should automatically engage.

Front View

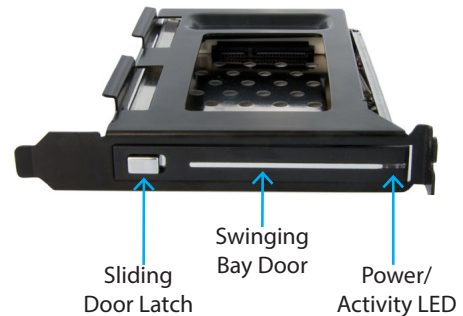

Rear View

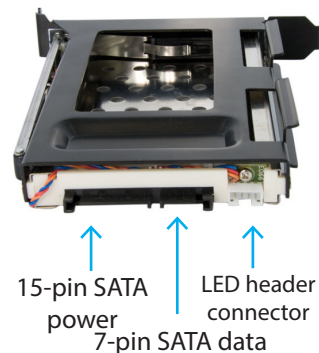

## FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

## Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

## Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.