

## Internal USB 2.0 to Slimline CD/DVD Optical SATA Adapter

USB2SLSATINT

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

### Packaging Contents


- USB2SLSATINT adapter
- 2 x Mounting screws
- Installation Guide

### System Requirements

- Slimline SATA optical drive
- SP4 power connector on power supply
- USB enabled computer system with available connector
- USB enabled operating system

### Installation

1. Connect the Slimline SATA connector on the USB2SLSATINT adapter to the connector on the Slimline SATA optical drive.
2. Fasten the adapter board to the optical drive using the two included mounting screws.
3. Mount the assembled optical drive into the computer system. If the system does not have a slim optical drive bay, a mounting bracket may be necessary (i.e. StarTech.com ID: SLIMCDFDCAGE for 5.25" bays).
4. Connect a 5-pin USB header cable (not included) from the adapter board to an available USB connector/header on the computer system, using an appropriate cable or adapter (i.e. StarTech.com ID: USBINT5PIN).
5. Connect an SP4 floppy power connector from the system power supply to the SP4 connector on the adapter.

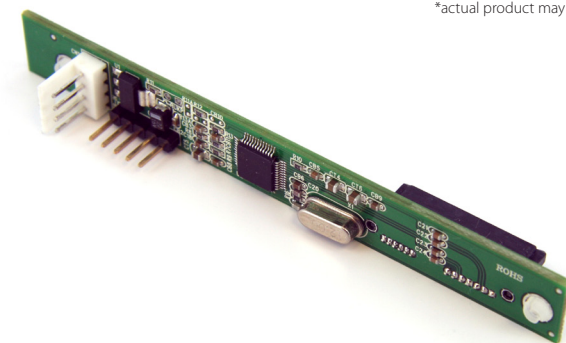

\*actual product may vary from photos

### Specifications

|                                   |   |
|-----------------------------------|---|
| <b>Bus Interface</b>              | USB 2.0   |
| <b>Chipset ID</b>                 | Jmicron JM20329   |
| <b>Connectors</b>                 | 1 x Slimline SATA<br>1 x SP4 floppy power<br>1 x 5-pin USB header |
| <b>Maximum Data Transfer Rate</b> | USB 2.0: 480Mbps  |
| <b>Operating Temperature</b>      | -10°C ~ 50°C (14°F ~ 122°F)                                       |
| <b>Storage Temperature</b>        | -20°C ~ 60°C (-4°F ~ 140°F)                                       |
| <b>Humidity</b>                   | 0 ~ 75% RH  |
| <b>Dimensions (LxWxH)</b>         | 102.28mm x 25.0mm x<br>12.14mm                                    |
| <b>Weight</b>                     | 25g   |

## FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

## Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

## Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.