


USB4 Docking Station - Dual 4K 60Hz HDMI, 6-Port USB Hub, 2.5GbE, 100W PD


Product ID

155NA-USB4-DOCK / 155UE-USB4-DOCK


Product Diagram (Side A)

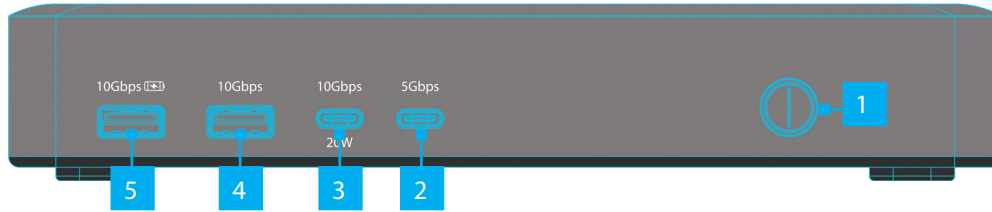

(Side B)

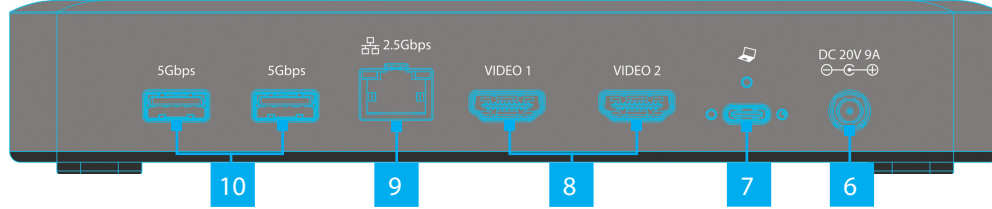

(Side C)

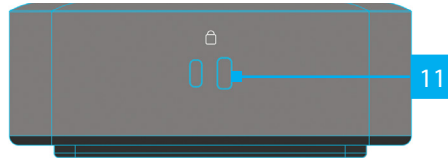

Requirements

- Computer
 - USB4 Port
 - USB-C Port with DP Alt Mode
- This Dock can function with either a USB4 or USB-C host port. For maximum performance a USB4 port is recommended. Video support and performance, such as resolution, and refresh rate depend on the host computer's video controller. Please verify the specifications of the host computer.

For the latest drivers, manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/155NA-USB4-DOCK or www.StarTech.com/155UE-USB4-DOCK

Component	Function
1 Power Button	<ul style="list-style-type: none"> • Press and Release to Toggle Power for the Dock
2 USB-C Data Port	<ul style="list-style-type: none"> • Connect a USB-C Peripheral • USB 3.2 Gen 1 (5Gbps) • Supports up to 7.5W(5V/1.5A) of Power
3 USB-C Data/Power Port	<ul style="list-style-type: none"> • Connect a USB-C Peripheral • USB 3.2 Gen 2 (10 Gbps) • Power Delivery 3.0
4 USB-A Data Port	<ul style="list-style-type: none"> • Connect a USB-A Peripheral • USB 3.2 Gen 2 (10 Gbps) • Supports up to 4.5W (5V/0.5A) of Power
5 USB-A Data/Charge Port	<ul style="list-style-type: none"> • Connect and/or Charge a USB-A Peripheral • USB 3.2 Gen 2 (10 Gbps) • Supports 7.5W BC 1.2 Charging (5V/1.5A)
6 DC 20V Port	<ul style="list-style-type: none"> • Connect the Dock to a Power Source, using the Universal Power Adapter
7 USB4 Host Port (Screw-Locking, USB Type-C)	<ul style="list-style-type: none"> • Connect to a USB-C Port on a Host Computer • USB4 (40 Gbps) • Power Delivery 3.0 Specification • Capability of charging the Host Computer up to 100W
8 2x HDMI Video Ports	<ul style="list-style-type: none"> • Connect HDMI Displays • HDMI 2.1 • Up to 8K (7680x4320) 60Hz • Via DisplayPort 1.4 Alt Mode
9 2.5 Gigabit Ethernet Port	<ul style="list-style-type: none"> • Connect the Dock to a Network Device, using a Network Cable • 2.5GBASE-T
10 2x USB-A Data Ports	<ul style="list-style-type: none"> • Connect USB-A Peripherals • USB 3.2 Gen 1 (5 Gbps) • Supports up to 4.5W (5V/0.9A) of Power
11 2x Lock Slots (Standard & Nano)	<ul style="list-style-type: none"> • Connect a K-Slot Style Locking Device to deter the theft of the Docking Station

Package Contents

- USB-C Docking Station x 1
- 3 ft (1 m) USB4 Host Cable x 1
- Universal Power Adapter x 1
- Quick-Start Guide x 1

To view manuals, FAQs, videos, drivers, downloads, technical drawings, and more, visit www.startech.com/support.

Installation

1. Connect the **Power Adapter** from an AC outlet, to the **DC 20V Port** on the Dock.
2. When connecting USB-A peripheral devices, connect a USB-A cable from the USB peripheral devices to the **USB-A Data Ports** and/or the **USB-A Data/Charge Port** on the Dock.
3. When connecting USB-C peripheral devices, connect a USB-C cable from the USB peripheral devices to the **USB-C Data Port** and/or the **USB-C Data/Charge Port** on the Dock.
4. When connecting a wired network, connect an RJ-45 terminated network cable (CAT 5e or better) from the local area network (e.g. Router, Switch, Modem, etc.) to the **2.5 Gigabit Ethernet Port** on the Dock.
5. When connecting up to two HDMI displays, connect an HDMI cable from each of the HDMI displays to the **HDMI Video Ports** on the Dock.
6. Press the **Power Button** on the Dock, into the ON position.
7. Connect the included **USB4 Host Cable** from a **USB4 Port** or **DP Alt Mode Enabled USB-C Port** on the **Host Computer**, to the **USB4 Host Port** on the Dock. The **Host Computer** will automatically detect and install the Dock.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Warranty Information

This product is backed by a 3-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

StarTech.com Ltd. 45 Artisans Cres London, Ontario N5V 5E9 Canada	StarTech.com LLP 4490 South Hamilton Road Groveport, Ohio 43125 U.S.A.	StarTech.com Ltd. Unit B, Pinnacle 15 Gowerton Rd, Brackmills, Northampton NN4 7BW United Kingdom	StarTech.com Ltd. Siriusdreef 17-27 2132 WT Hoofddorp, The Netherlands	FR: startech.com/fr DE: startech.com/de ES: startech.com/es NL: startech.com/nl IT: startech.com/it JP: startech.com/jp
--	--	--	--	--



Regulatory Compliance

FCC -- Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.