

## USB-C™ Quad-4K Docking Station - DisplayPort and HDMI - 100W PD

## Product Diagram (DK31C4DPPD, DK31C4DPPDUE and DK31C4DPPDI)

## Front View

*\*Actual product may vary from photos*

1

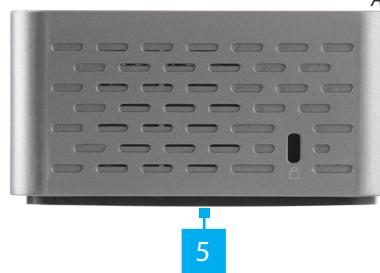
2

3

4

Port	Specifications and Installation
1 3.5mm Audio Port	<ul style="list-style-type: none"> <li>Connect an <b>Audio Device</b></li> <li><b>4 Position Audio Jack for Headset use</b></li> </ul>
2 USB-A Charging Port	<ul style="list-style-type: none"> <li>SuperSpeed USB 5Gbps (USB 3.2 Gen 1)</li> <li>Supports USB BC 1.2</li> <li>Supports Apple Charging of up to 2.4A</li> <li>Connect the <b>Docking Station</b> to a <b>SuperSpeed USB 5Gbps Peripheral or Storage Device</b> (e.g. flash drive), using a <b>SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Cable</b></li> </ul>
3 USB-C Charging Port	<ul style="list-style-type: none"> <li>SuperSpeed USB 10Gbps (USB 3.2 Gen 2)</li> <li>Supports charging of up to 3A 5V</li> <li>Connect the <b>Docking Station</b> to a <b>SuperSpeed USB 10Gbps Peripheral or Storage Device</b> (e.g. flash drive), using a <b>SuperSpeed USB-C 10Gbps (USB 3.2 Gen 2) Cable</b></li> </ul>
4 Power Button	<ul style="list-style-type: none"> <li>Powered <b>ON</b> by default</li> <li><b>Solid White LED</b> indicates the <b>Docking Station</b> is receiving power and is powered <b>ON</b></li> <li>Press and release the <b>Power Button</b> to power <b>ON</b> the <b>Docking Station</b></li> </ul>

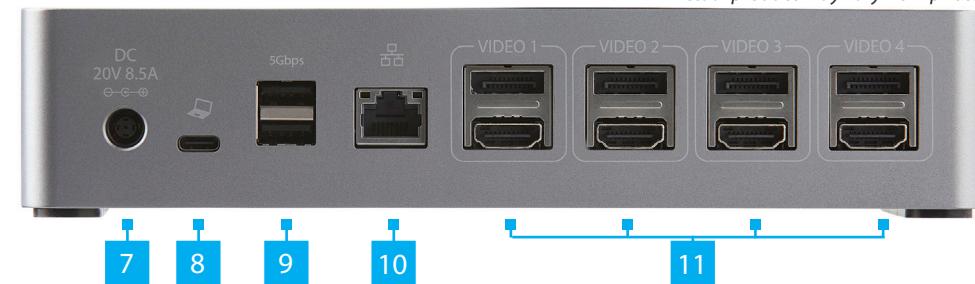
## Side View

*\*Actual product may vary from photos*

5

Port	Specifications and Installation
5 Mounting Holes	<ul style="list-style-type: none"> <li>(Optional) Mount the <b>Docking Station</b>, using appropriately sized <b>Mounting Plate Assembly</b> (sold separately)</li> </ul>
6 Lock Slot	<ul style="list-style-type: none"> <li>Secure the <b>Docking Station</b> to a stationary object</li> </ul>

## Rear View

*\*Actual product may vary from photos*

7

8

9

10

11

Port	Specifications and Installation
7 DC 20V Port	<ul style="list-style-type: none"> <li>Connect the <b>Docking Station</b> to a <b>Power Source</b>, using the <b>Universal Power Adapter</b></li> </ul>
8 USB-C Host Port	<ul style="list-style-type: none"> <li>SuperSpeed USB 10Gbps (USB 3.2 Gen 2)</li> <li>Charge the <b>Host Device</b> while using the <b>Docking Station</b> <ul style="list-style-type: none"> <li>USB Power Deliver (PD) 5/9/12/15/20V</li> </ul> </li> <li>Connect the <b>Docking Station</b> to a <b>Laptop</b>, using the <b>SuperSpeed USB-C 10Gbps (USB 3.2 Gen 2) Host Cable</b></li> </ul>
9 USB-A Device Ports	<ul style="list-style-type: none"> <li>SuperSpeed USB 5Gbps (USB 3.2 Gen 1)</li> <li>Maximum 0.9A for downstream charging</li> <li>Connect the <b>Docking Station</b> to two <b>SuperSpeed USB 5Gbps Peripherals and/or Storage Devices</b> (e.g. flash drives), using a <b>SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Cable</b></li> </ul>
10 RJ45 Port	<ul style="list-style-type: none"> <li>10/100/1000 Mbps</li> <li>Connect the <b>Docking Station</b> to a <b>Network Device</b>, using a <b>Network Cable</b></li> </ul>

Video 1-4 DisplayPort  
Port/HDMI Ports

DisplayPort Ports:

- Connect the **Docking Station** to a **DisplayPort Enabled Display Device**, using a **DisplayPort Cable**
- or -
- HDMI Ports:
- Connect the **Docking Station** to an **HDMI Enabled Display Device**, using an **HDMI Cable**

## Package Contents

- Docking Station x 1
- Host Cable x 1
- Universal Power Adapter x 1
- Power Adapter Cords (NA/JP) x 1
- Quick-Start Guide x 1

## Requirements

For the latest requirements, please visit:

[www.startech.com/DK31C4DPPD](http://www.startech.com/DK31C4DPPD) or [www.startech.com/DK31C4DPPDUE](http://www.startech.com/DK31C4DPPDUE)

DK31C4DPPDI: [www.startech.com/DK31C4DPPDI](http://www.startech.com/DK31C4DPPDI)

- Host Laptop with USB-C Port
  - USB PD Support

## Installation

**Notes:** Depending on your Host Laptop's operating system, the required drivers will automatically be installed when the Docking Station is connected and powered on. If the drivers do not automatically install, follow the steps below.

1. Use a web browser to navigate to [www.startech.com/DK31C4DPPD](http://www.startech.com/DK31C4DPPD) or [www.startech.com/DK31C4DPPDUE](http://www.startech.com/DK31C4DPPDUE).
2. On the Product page, click the Support tab located in the middle of the screen.
3. In the Drivers and Downloads section, click on the driver link that corresponds with the operating system running on the host laptop.
4. Once the download is complete, extract the contents of the file.
5. Click the appropriate driver for the version of operating system that you are running and follow the on-screen prompts to complete the installation.

## Operation

### RJ45 Port LED Indicators

LED Color	Status	Indication
Green	Solid	• Link speed is either 1000Mbps (1 GbE), 100Mbps, or 10Mbps
	Off	• No connection established
Amber	Flashing	• Network traffic detected
	Off	• No link established



FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)

**HQ Contact:**  
StarTech.com Ltd.  
45 Artisans Crescent,  
London, ON N5V 5E9,  
Canada

**US Contact:**  
StarTech.com USA LLP  
4490 South Hamilton Rd,  
Groveport, OH 43125,  
United States

**UK Contact:**  
StarTech.com Ltd.  
15 Gowerton Rd,  
Northampton, NN4 7BW,  
United Kingdom

**EU Contact:**  
StarTech.com Ltd.  
Siriusdreef 17-27  
2132 WT Hoofddorp  
The Netherlands

**JP Contact:**  
StarTech.com Japan K.K.  
Atelier Yours Ogawamachi 7F  
1-10-2 Kanda Ogawamachi  
Chiyoda-ku, Tokyo 101-0052  
Japan