


1:1 Standalone Hard Drive Duplicator and Eraser for 2.5"/3.5" SATA and SAS Drives

SATASDUPE11

Important: Read and understand the entire Quick-Start Guide before you use this product, and follow the instructions as they are outlined. Failure to do so might result in property damage or device failure.

Product diagram

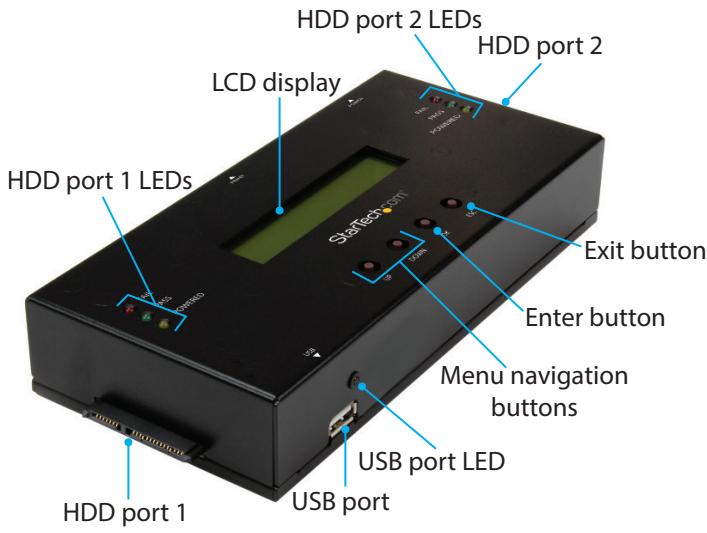

Side view



Side view



For the latest information, technical specifications, and support for this product, please visit www.StarTech.com/SATASDUPE11.

Package contents

- 1 x SATA/SAS duplicator and eraser
- 1 x universal power adapter (NA/JP, UK, EU, AU)
- 2 x drive-connector cables
- 2 x drive pads
- 1 x quick-start guide

System requirements

This converter is OS independent and doesn't require any additional drivers or software.

System requirements are subject to change. For the latest requirements, please visit www.StarTech.com/SATASDUPE11.

Note: For advanced functionality the default password is 123456.

Erase and copy modes

The SATASDUPE11 supports six erase modes and four copy modes.

Mode	Definition
Erase modes	
Quick erase	The partition table is quickly erased
Full erase	The entire HDD is erased.
3-Pass (DoD 5220.22-M)	A multi-pass overwrite based on DoD 5220.22-M specifications is completed.
DoD erase and compare (DoD 5220.22-M)	The HDD is erased three times and compared one time based on DoD 5220.22-M standards.
Secure erase	The HDD is erased according to secure erase standards.
7-Pass erase (DoD 5220.22-M)	A multi-pass overwrite based on DoD 5220.22-M is completed.
Cryptographic Erase	Leverages the drive's built-in encryption capabilities to securely erase data by deleting the encryption key.
Copy modes	
Copy system and files	Only the data area of the source HDD is copied and the empty space isn't copied.
Copy all partitions	The partition areas of the HDD are copied and the non-partition, empty space isn't copied.
Copy the whole HDD	The entire HDD is copied, including empty space.
Copy a percentage	A specified percentage range of the HDD is copied.

Copy a drive

Note: You should avoid plugging drives directly into the SATSASDUPE11, as it puts undue strain on the device connectors.

1. Connect the universal power adapter to the **Power jack** on the back of the SATSASDUPE11, and to a power source.
2. Use the **Power switch** on the back of the device to turn it on.
3. Connect one of the drive connector cables to **HDD port 1** and to your source drive.
4. Connect the other drive connector cable to **HDD port 2** and to your destination drive.
5. Place the drives on the included drive pads. Avoid placing drives directly on a metal surface.
6. Use the **Menu navigation buttons** on the device to navigate to the **Setup** menu, and press the **Enter** button.
7. Navigate to the **Copy Area** menu, and press the **Enter** button.
8. Select a copy mode, and press the **Enter** button.
9. Use the **Menu navigation buttons** on the device to navigate back to the **Utility** menu, and press the **Enter** button.
10. Select **Copy**, and press the **Enter** button.

Warning! After you begin copying a drive, don't disconnect either drive or interrupt the process before it has finished. Doing so might result in damage to the drive or lost data.

When both of the yellow port LED indicators are no longer illuminated, the copying process is complete.

Erase a drive

Warning! Before you erase a drive, make sure that you back up any important data from the drive.

1. Connect the universal power adapter to the **Power jack** on the back of the SATSASDUPE11, and to a power source.
2. Use the **Power switch** on the back of the device to turn it on.
3. Connect one of the drive connector cables to **HDD port 1** and to the drive that you want to erase.
4. Place the drives on the included drive pads. Avoid placing drives directly on a metal surface.

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit than the receiver.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device. If shielded interface cables are included with the product, or if additional components or accessories are designated for use with the installation, they must be used to ensure compliance with FCC regulations.

ISED Statement / Déclaration d'ISDE

CAN ICES-003(B) / NMB-003(B)

This Class B digital apparatus complies with Canadian ICES-003.

This device complies with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Le présent appareil est conforme aux CNR d'ISDE Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

StarTech.com

Hard-to-find made easy®

5. Use the **Menu navigation buttons** on the device to navigate to an erase mode, and press the **Enter** button.

Warning! After you press the **Enter** button, don't disconnect the drive until the process is complete. Removing the drive before it is done being erased might result in damage to the drive.

When the yellow port LED indicator is no longer illuminated, the drive has been erased.

About the LED indicators

The SATSASDUPE11 features seven LED indicators. Consult the table below for more information about the LEDs.

LED behavior	Significance
USB port LED is illuminated	Data is being transferred to or from the USB port.
HDD port LEDs	
Red LED is illuminated	An error is occurring. Check the LCD display for more information.
Green LED is illuminated	The operation is complete.
Green LED is flashing	The connected drive is currently being accessed.
Yellow LED is illuminated	The connected drive is receiving power.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads. For the latest drivers/software, please visit www.startech.com/downloads

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Warranty Information

This product is backed by a two-year warranty.

StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.