



SATA35252X

3.5" Bay to Dual 2.5" SATA HDD Adapter

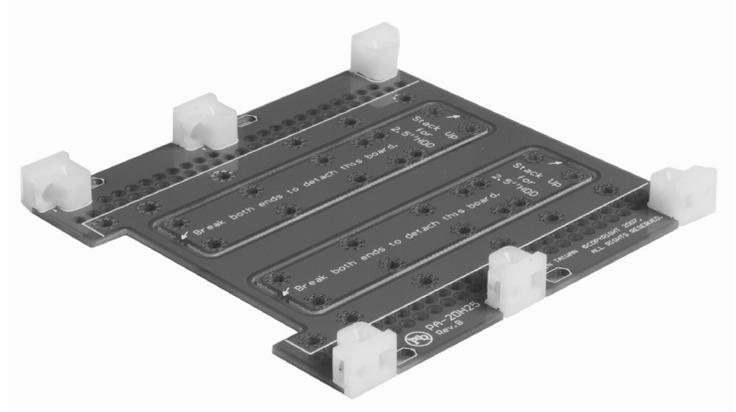

Features

- Holds one or two 2.5" SATA hard drives
- Occupies a single 3.5" drive slot
- Includes 4-pin HDD to SATA power cable

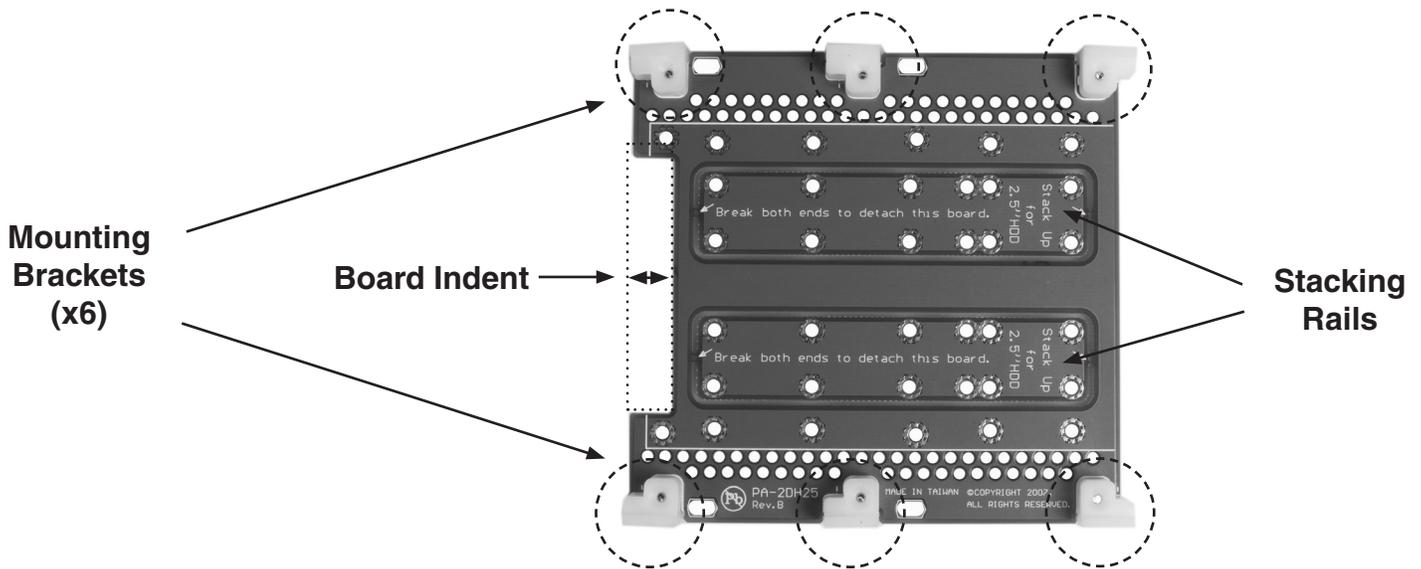

Installation

WARNING! Computer equipment can be severely damaged by static electricity. Be sure that you are properly grounded before opening your computer case or touching your hard drive. StarTech.com recommends that you wear an anti-static strap when installing any computer component. If an anti-static strap is unavailable, discharge yourself of any static electricity build-up by touching a large grounded metal surface (such as the computer case) for several seconds. Be sure to handle your hard drive carefully and consult your hard drive and laptop manufacturer for details on how to remove the drive.

Single Drive Installation

1. Place the 2.5" hard drive on a flat, stable surface, label side down.
2. Place SATA35252X on top of the drive, such that the plastic fastening tabs are facing down, and the hard drive mounting screw holes are aligned with the appropriate holes provided by SATA35252X.

Please note the drive outline that is printed on the board - by installing the drive within this spacing, the drive interface is allowed to overhang the indent in the board, facilitating connectivity.

3. Fasten SATA35252X to the drive, using the screws provided. Once the drive has been secured to

SATA35252X, fasten SATA35252X (with drive installed) to a 3.5" drive slot, as you would a standard 3.5" drive, by threading the drive screws into the holes on the mounting tabs.

Dual Drive Installation

1. Gently remove the stacking rails (shown on reverse), one at a time, from the main board.
2. Position one of the stacking rails so that the length of the rail is parallel with the side of the first drive you wish to mount, and the screw holes are suitably aligned with holes provided by the board, with the drive label facing upward.



3. Repeat step #2 on the other side of the drive, positioning the remaining stacking rail in an identical fashion, parallel to the first stacking rail. Be sure to use the bottom holes on both sides).
4. Repeat steps #2 and #3 with a second drive, using the remaining screw holes.
5. Once the drives have been secured to the stacking rails, place the (now joined) hard drives on a flat, stable surface, label side down. Position the SATA35252X main board over the drives (mounting brackets facing down), ensuring proper alignment with the screw holes on the board in relation to those provided by the (bottom) drive, as well as with the drive interface connectors and the board indent.

Fasten the SATA3525X main board to the base of the (bottom) drive, using the provided screws.

6. Attach SATA35252X (with drives installed) to a 3.5" drive slot, as you would a standard 3.5" drive, by threading the drive screws into the holes on the mounting tabs (as opposed to those found on the side of a standard 3.5" drive).

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a one-year warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product.

Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.